




FR4

Farbe: gelb

Spiralfeder

für sehr starke Belastungen

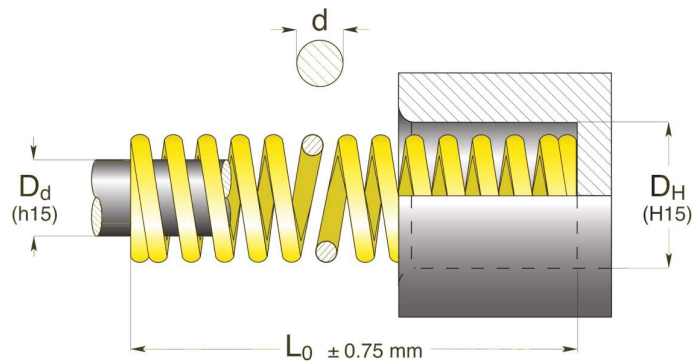

Code	D _H	D _d	L ₀	R		A		B		C		D		E
	Hole Diameter	Rod Diameter	Free Length	Spring Constant		17% L ₀		20% L ₀		22.5% L ₀		25% L ₀		 approx.
	d					+ 3.000.000		~ 1.500.000		300 - 500.000		100 - 200.000		do not use
	mm	mm	mm	N/mm	mm	N	mm	N	mm	N	mm	N	mm	
TG 6 - 016	6.3	3.2	16	33.0	2.7	89.8	3.2	105.6	3.6	118.8	4.0	132.0	9.2	
TG 6 - 025			25	19.8	4.3	84.2	5.0	99.1	5.6	111.4	6.3	123.8	14.4	
TG 6 - 038			38	11.9	6.5	77.0	7.6	90.6	8.6	101.9	9.5	113.2	21.6	
TG 6 - 051			51	9.5	8.7	82.5	10.2	97.0	11.5	109.1	12.8	121.3	27.8	
TG 8 - 016	8.3	4.5	16	30.9	2.7	83.9	3.2	98.7	3.6	111.1	4.0	123.4	9.3	
TG 8 - 025			25	23.0	4.3	97.8	5.0	115.0	5.6	129.4	6.3	143.8	13.8	
TG 8 - 038			38	13.2	6.5	85.5	7.6	100.5	8.6	113.1	9.5	125.7	22.9	
TG 8 - 051			51	9.3	8.7	80.3	10.2	94.5	11.5	106.3	12.8	118.1	29.3	